



Line of ultra-thin transparent glass-like panels with uniform light emission, completely clear when off, completely diffused when on, lighting up on both sides.

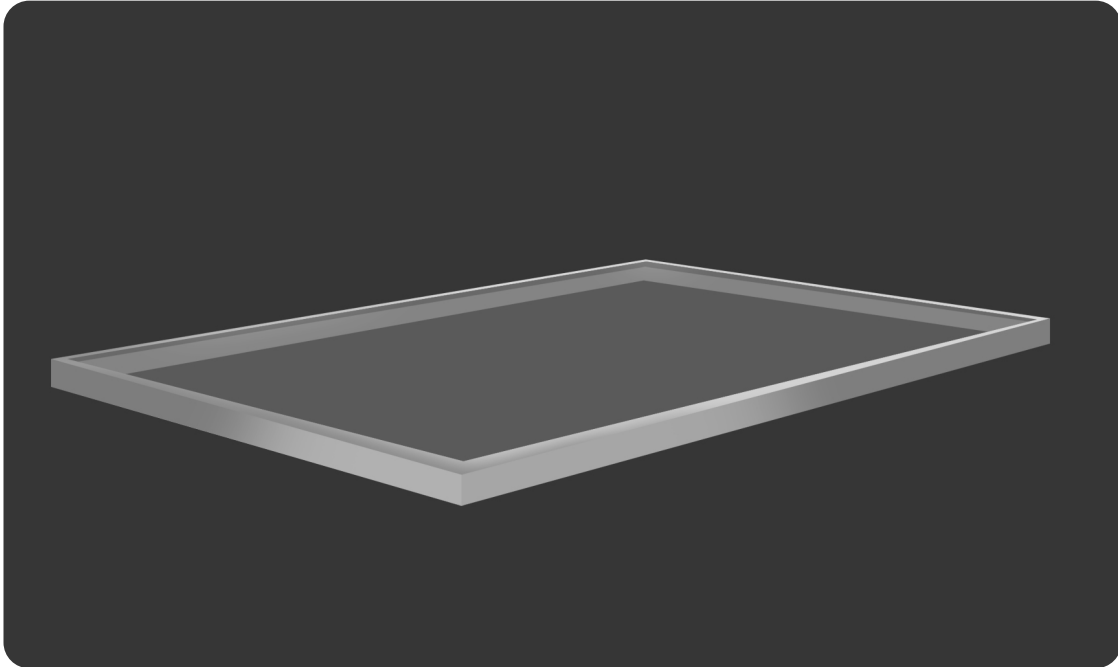


Technical Specs


INPUT VOLTAGE	24V DC
DRIVER	AC DC 24V DC OUTPUT (class 2 Power Unit)
DIMMABILITY	YES by all existing systems (0-10V, Dali, DMX, ELV/MLV, Lutron Ecosystem, ...)
POWER CONSUMPTION	4.5 W/ft - 14 W/mt of perimeter
LUMEN DELIVERED	290 lm per linear ft (890 lm per linear meter) of perimeter
IP GRADE	IP 40 - suitable for Dry Location - or IP54 (Damp location) under request
CRI	> 95
WEIGHT	5.7 lbs/sq. ft (25 Kg/sq. mt)
LIFE TIME	70.000 hrs
WARRANTY	3 Years (36 months)
CERTIFICATIONS	 <ul style="list-style-type: none"> • Ceiling surface Mounted • Ceiling recessed Type IC Inherently protected • Wall surface Mounted • Storage Area of a Clothes Closet

Size

RECTANGLE (R)

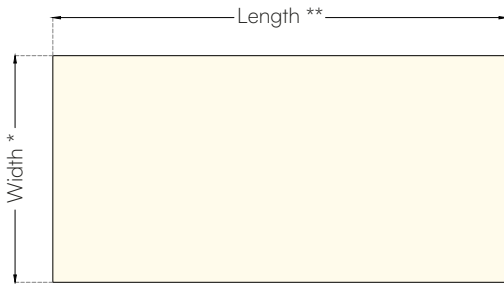


CUSTOM (C)
(Need CAD drawings)

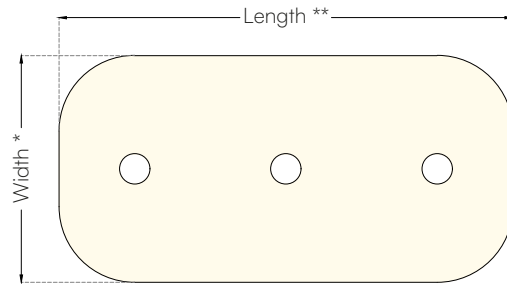



* Custom Width: from 1 FT to 4 FT
from 304,8 mm to 1219,2 mm

** Custom Length: from 1 FT to 10 FT
from 304,8 mm to 3048 mm

Photometric

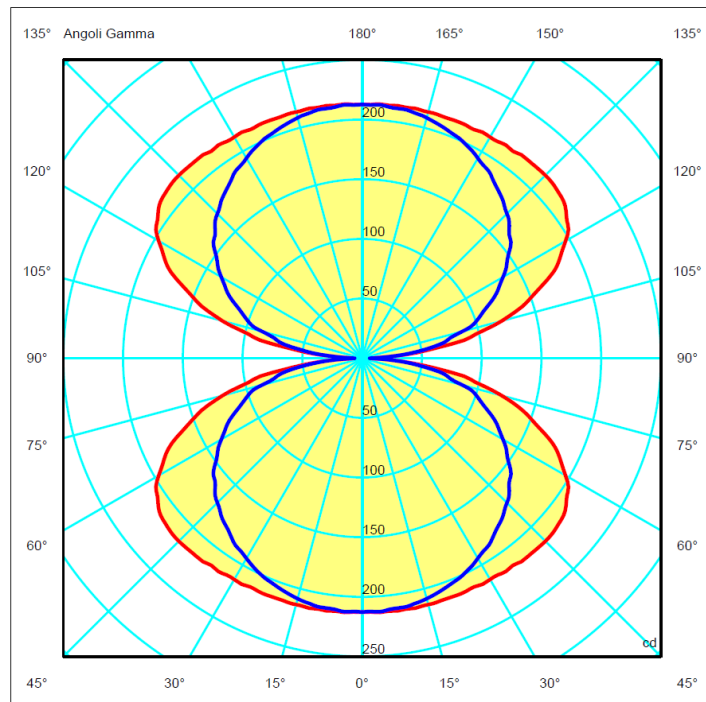

Option A - with cable from the thickness

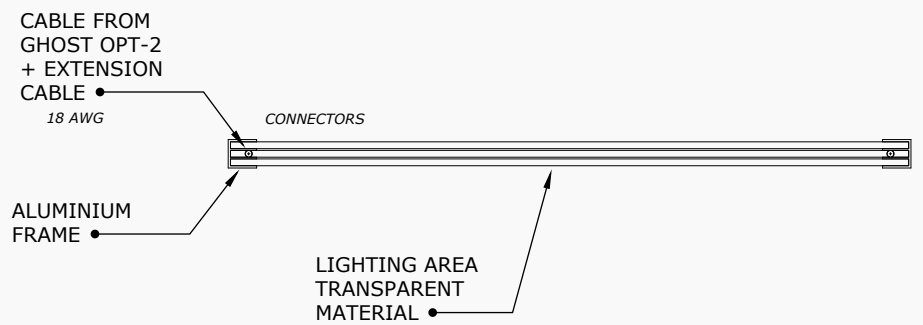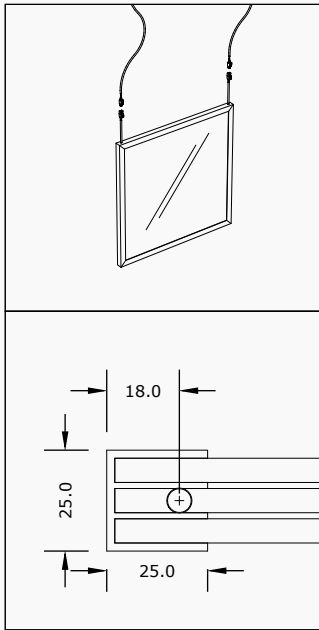

Option B - with cable from the rear side

